
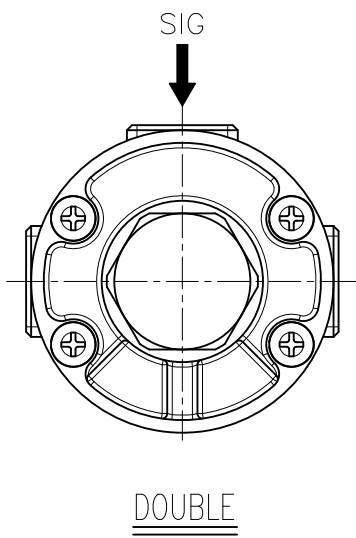
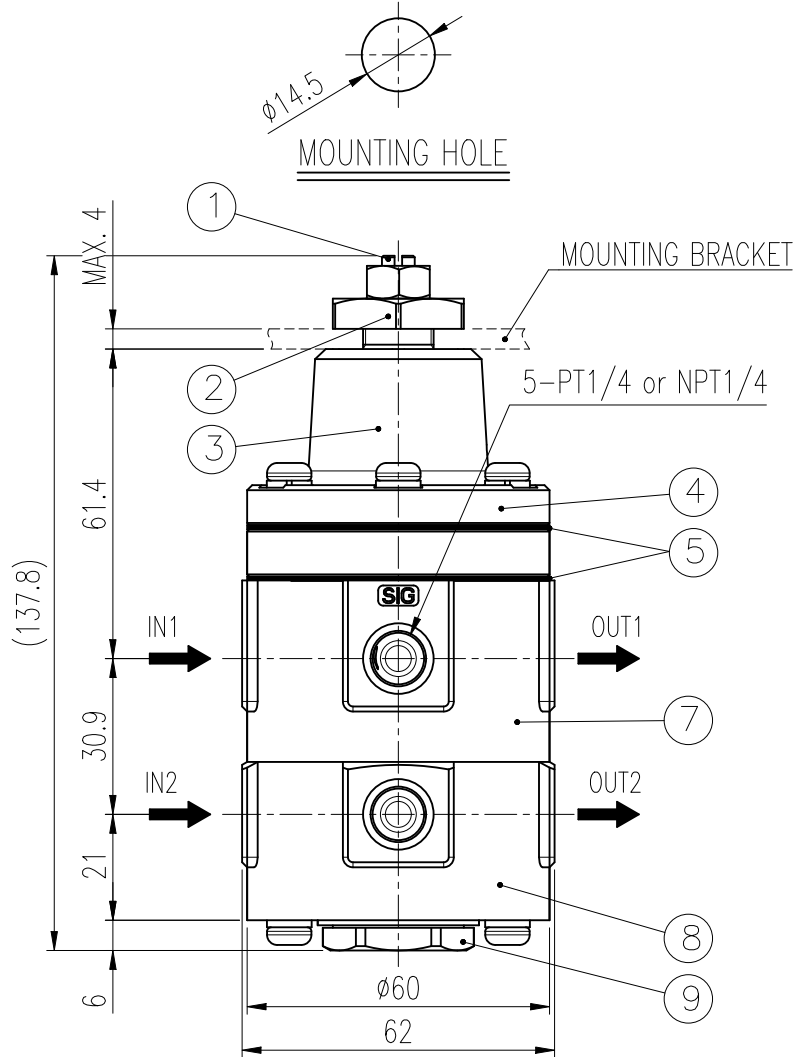
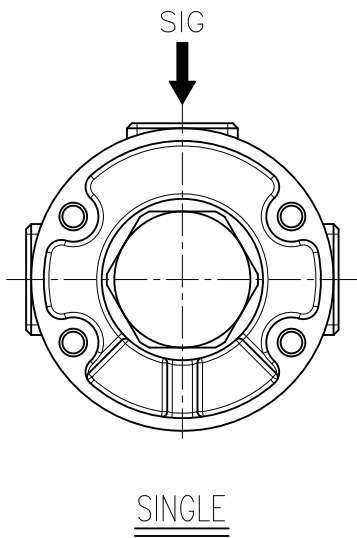


NO.	DATE	REVISION	DESIGNED	CHECKED	APPROVED
△0	151215	RELEASED	SHAN	-	SHAN
△1	220221	ADD TEMPERATURE GRADE	SHYEOM	-	DKMIN

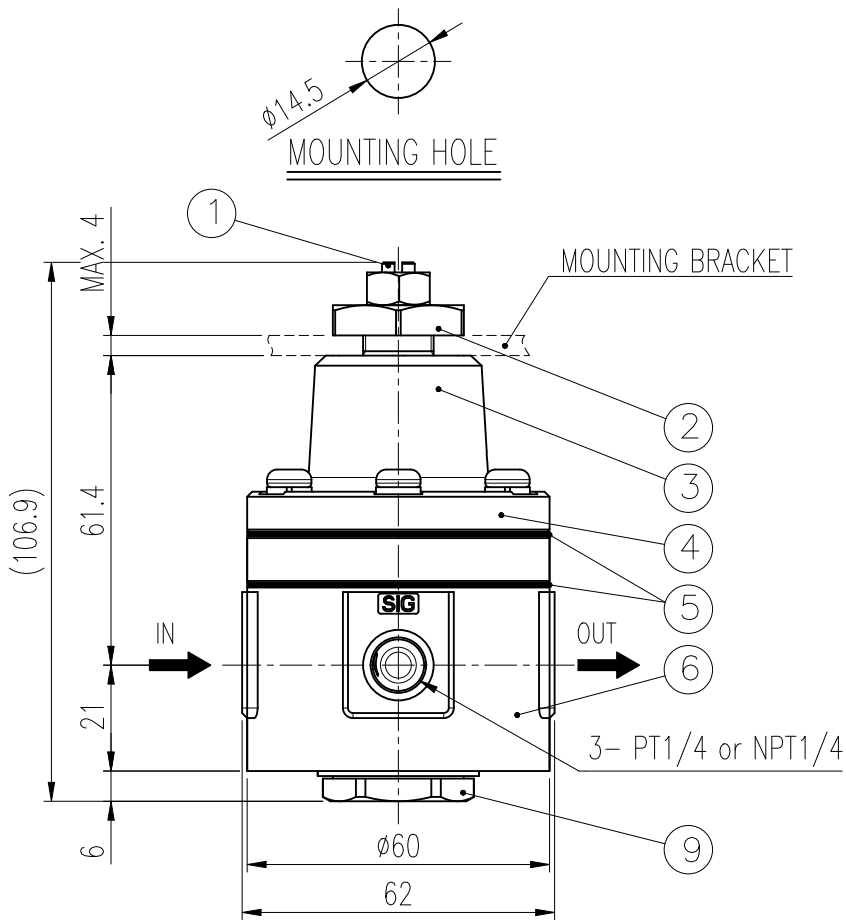

PART LIST

9	PLUG	C3604BD + Ni PLATED
8	BODY DOUBLE LOWER	ALDC12
7	BODY DOUBLE	ALDC12
6	BODY SINGLE	ALDC12
5	DIAPHRAGM	Low / High / Ultra Low Temp. : SILICONE Standard : NBR
4	RING	ALDC12
3	COVER	ALDC12
2	NUT MOUNTING	STS303
1	ADJUST SHAFT	STS303
NO.	PART NAME	MATERIAL

SPECIFICATIONS

Working fluid		Compressed air
Max. supply pressure		1.0 MPa
Signal pressure		0.14 ~ 0.7 MPa
Max. Lock-Up pressure		0.7 MPa
Flow Capacity (Cv)		0.9
Hysteresis		0.01 MPa
Signal Connection		PT1/4 or NPT1/4
In / Out Connection		PT1/4 or NPT1/4
Ambient Temp.	Standard	-20°C ~ 70°C
	High Temp.	-20°C ~ 120°C
	Low Temp.	-40°C ~ 70°C
	Ultra Low Temp.	-60°C ~ 70°C
In / Out Connection		PT1/4 or NPT1/4
Housing Material		Aluminum die-cast
Weight	Single	0.45kg
	Double	0.63kg

SURFACE TEXTURE		WEIGHT	g	PROJECT	-	
FINISH		SHEET No.	1 / 1	PRODUCT NAME	LOCK UP VALVE	
MATERIAL		UNIT	mm	MODEL	TS200	
QUANTITY		SCALE	1 / 1.5	TITLE	LOCK UP VALVE ASS'Y	REV.
OTHERWISE NOTE		PROJECTION	3RD ANGLE			
GENERAL DIM		DWG SIZE	A3	DWG. NO.	TS200 01 A1	1