

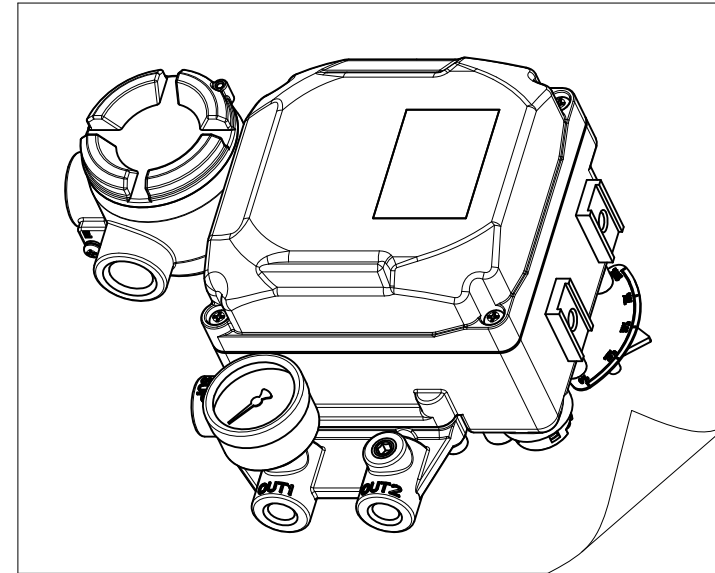
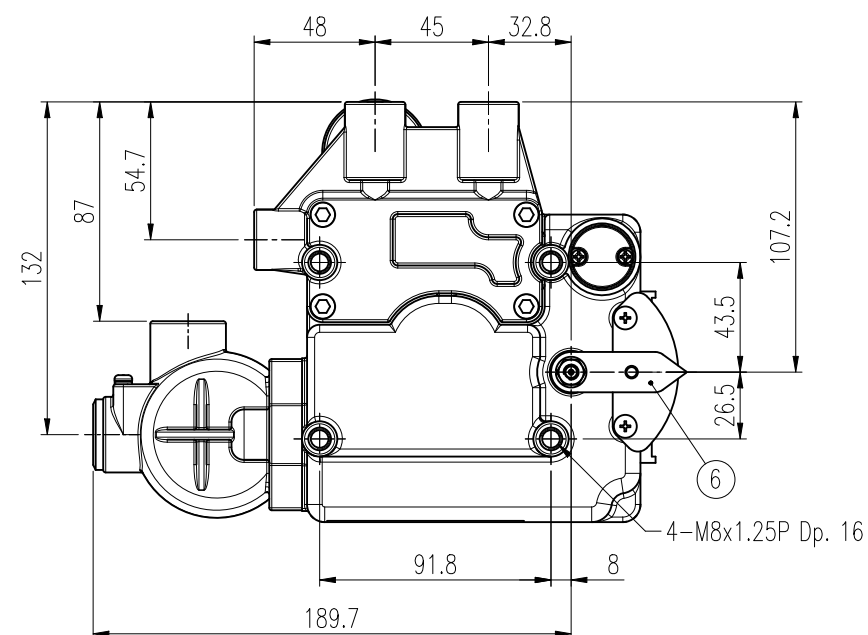
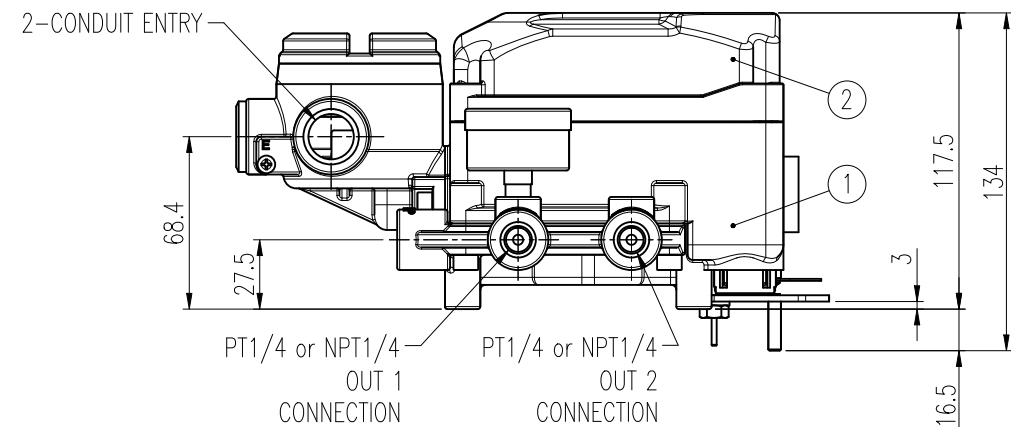


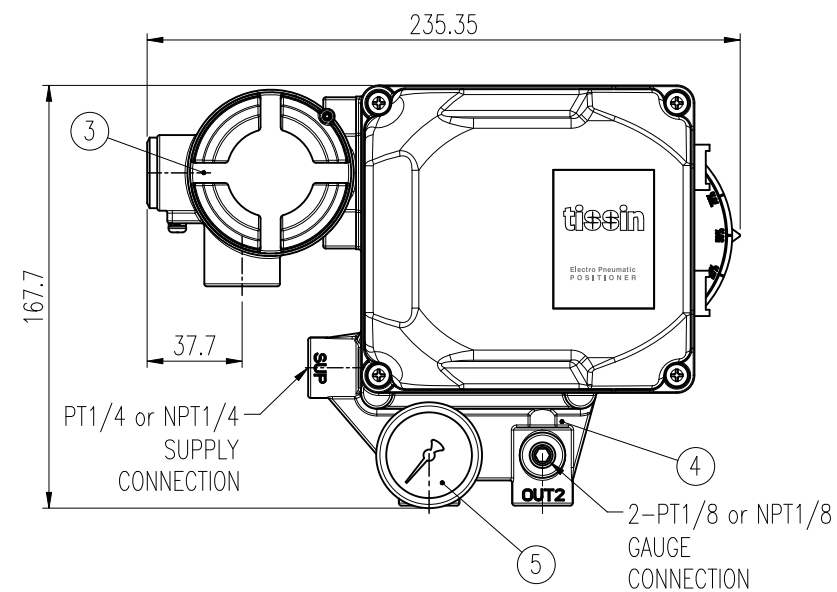

FEEDBACK LEVER

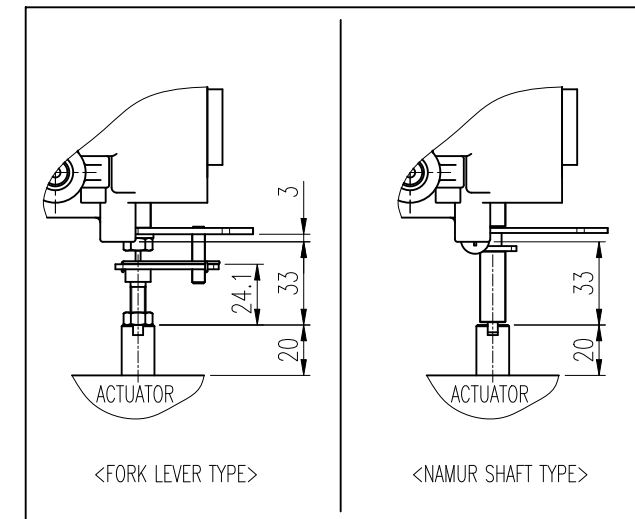

PART LIST

6	FEEDBACK LEVER	STS304	1
5	PRESSURE GAUGE	STS304	1
4	BLOCK GAUGE	ALDC12	1
3	JUNCTION BOX	ALDC12	1
2	COVER BASE	ALDC12	1
1	BODY BASE	ALDC12	1
NO.	PART NAME	MATERIAL	Q'TY

NO.	DATE	REVISION	DESIGNED	CHECKED	APPROVED
0	150918	RELEASED	SHAN	-	SHAN
1	181029	ADD TEMPERATURE GRADE	DKMIN	-	DKMIN
2	220221	ADAPT TO REALITY	SHYEOM	-	DKMIN

SPECIFICATIONS

Acting Type	Single or Double	
Input Signal	4 ~ 20mA	
Impedance	250±15Ω	
Working fluid	Compressed air	
Max. working pressure	0.7 MPa	
Min. working pressure	0.14 MPa	
Air Consumption (sup=0.14MPa)	<2.5 LPM	
Flow Capacity (sup=0.14MPa)	>80LPM	
Ambient Temp.	Operating Temp.	-20°C ~ 70°C (Standard) -40°C ~ 70°C (Low Temp.) -63°C ~ 70°C (Ultra Low Temp.) -20°C ~ 120°C (High Temp.)
	Explosion Temp.	ATEX T5 : -40°C ~ 60°C T6 : -40°C ~ 40°C EAC T5 : -63°C ~ 60°C
Explosion Proof	Ex ia IIC T5/T6 Gb Ex db mb IIB T5/T6 Gb Ex db mb IIC T5/T6 Gb	
Protection	IP66	
Air Connection	PT1/4 or NPT1/4	
Gauge Connection	PT1/8 or NPT1/8	
Conduit entry	G(PF)1/2 or NPT1/2 or M20	
Pressure Gauge	Ø42, Max. 0.8MPa	
Stroke	0 ~ 90°	
Linearity	Single ±1.0% F.S. Double ±2.0% F.S.	
Hysteresis	±1.0% F.S.	
Sensitivity	Single ±0.2% F.S. Double ±0.5% F.S.	
Repeatability	±0.5% F.S.	
Housing Material	Aluminum die-cast	
Weight	2.8kg	

SURFACE TEXTURE		WEIGHT	g	PROJECT	-	
FINISH		SHEET No.	1 / 1	PRODUCT NAME	ELECTRO-PNEUMATIC POSITIONER	
MATERIAL		UNIT	mm	MODEL	TS600	
QUANTITY		SCALE	1 / 3	TITLE	ROTARY FLAME PROOF	REV.
OTHERWISE NOTE		PROJECTION	3RD ANGLE	DWG. NO.	TS600 EP 02 A1	2
GENERAL DIM		DWG SIZE	A3			